

BUILT TO A HIGHER STANDARD[®]

American Standard[®]

HEATING & AIR CONDITIONING

Product and Submittal Data


20 AccuComfort™ Variable Speed Platinum Heat Pumps

5A6V0X24A1000A/B

5A6V0X36A1000A/B

5A6V0X48A1000A/B

5A6V0X60A1000A/B

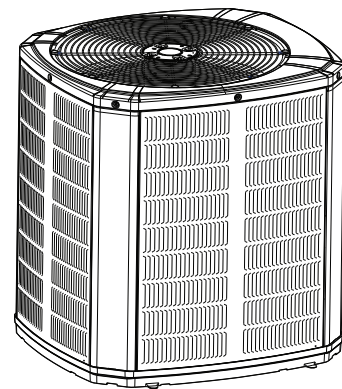

*Note: Graphics in this document are for representation only.
Actual model may differ in appearance.*

Introduction

Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

Trademark

All trademarks referenced in this document are the trademarks of their respective owners.

Revision History

- Updated the tables in Product Specifications chapter.
- Updated the wiring diagram.

Diagnostics Mobile App



The Diagnostics Mobile App is available by scanning a QR code above, the one located inside this unit or by searching for the Trane or American Standard Diagnostics App in your App Store®. This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.

Table of Contents

Model Number Description 4

General Data 5

Product Specifications 6

Sound Data..... 9

Wiring Diagram 10

Dimensional Data..... 11

Balance Point Heat Capacity Worksheets 12

Mechanical Specification Options..... 14

Model Number Description

Digit 1 – Refrigerant Type

5 = R-454B

Digit 2 – Brand

A = American Standard

Digit 3 – System Type

5 = Cold Climate Heat Pump

6 = HP

7 = AC

Digit 4 – Product Family

A = Silver/Gold AC

C = Light Commercial

H = Silver/Gold HP

V = Platinum VSPD

Digit 5 – Nominal Rated SEER2

0 = 20 SEER2

3 = 13 SEER2

4 = 14 SEER2

5 = 15 SEER2

6 = 16 SEER2

7 = 17 SEER2

8 = 18 SEER2

Digit 6 – Field Connection

0 = Brazed

X = Link™

Digit 7, 8 – Nominal Tonnage

12 = 1.0

18 = 1.5

19 = 1.5

24 = 2.0

25 = 2.0

30 = 2.5

31 = 2.5

36 = 3.0

37 = 3.0

42 = 3.5

43 = 3.5

48 = 4.0

49 = 4.0

60 = 5.0

61 = 5.0

Digit 9 – Major Design Change

A Thru Z Mode = No F, I, 0

Digit 10 – Power Supply (Voltage/Ph/Hz)

1 = 200–208–230/1/60

3 = 200–230/3/60

4 = 460/3/60

Digit 11, 12, 13 – Other Functions

000 = Typical-no meaning

Digit 14 – Minor Design Change

A Thru Z Mode = No F, I, 0

Digit 14 – Service Digit - Not Orderable

A Thru Z Mode = No F, I, 0

General Data

AHRI standard 210/240 rating conditions:

- Cooling: 80°F DB; air entering indoor coil: 67°F WB; air entering outdoor coil: 95°F DB
- High temperature heating: 47°F DB; air entering outdoor coil: 43°F WB; entering indoor coil: 70°F DB
- Low temperature heating: 17°F DB; air entering outdoor coil: 15°F WB; air entering indoor coil: 70°F DB
- Rated indoor airflow for heating is the same as for cooling.

AHRI standard 270 rating conditions:

The noise rating numbers are determined with the unit in cooling operation. Standard Noise Rating number is at 95°F outdoor air.

Product Specifications

Table 1. Models 5A6V0X24A1000A, 5A6V0X24A1000B, 5A6V0X36A1000A, and 5A6V0X36A1000B

Outdoor Unit ^{(a) (b)}	5A6V0X24A1000A	5A6V0X24A1000B	5A6V0X36A1000A	5A6V0X36A1000B
Power Conns. – V/Ph/Hz ^(c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. Brch. Cir. Ampacity	19	19	26	26
Br. Cir. Prot. Rtg. – Rec/Max. (Amps)	20/30	20/30	30/40	30/40
Compressor	Rotary	Rotary	Scroll	Scroll
No. Used – No. Speeds	1 – Variable	1 – Variable	1 – Variable	1 – Variable
MRC	17.8	17.8	18	18
Factory Installed				
Start Components ^(d)	No	No	No	No
Insulation/Sound Blanket	Yes	Yes	Yes	Yes
Compressor Heat	Yes	Yes	Yes	Yes
Outdoor Fan				
Dia. (in.) – No. Used	23 – 1	23 – 1	27.5 – 1	27.5 – 1
Type Drive – No. Speeds	Direct – Variable	Direct – Variable	Direct – Variable	Direct – Variable
No. Motors – Hp	1 – 1/3	1 – 1/3	1 – 1/2	1 – 1/2
Motor Speed R.P.M.	200 – 1200	200 – 1200	200 – 1200	200 – 1200
Volts/Ph/Hz	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60
MOC	1.5	1.5	2.3	2.3
Outdoor Coil – Type	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Rows – F.P.I.	1 – 24	1 – 24	1 – 24	1 – 24
Face Area (Sq. Ft.)	19.77	19.77	30.8	30.8
Tube Size (in.)	3/8	3/8	3/8	3/8
Refrigerant	R-454B	R-454B	R-454B	R-454B
Lbs. – R-454B (O.D. Unit) ^(e)	6 Lb – 8 Oz	6 Lb – 8 Oz	9 Lb – 8 Oz	9 Lb – 8 Oz
Factory Supplied	Yes	Yes	Yes	Yes
Rated Line Size – in. O.D. Gas ^(f)	1/2	1/2	5/8	5/8
Rated Line Size – in. O.D. Liq. ^(f)	5/16	5/16	5/16	5/16
Charging Specifications				
Subcooling (°F)	10	10	8	8
Dimensions	H x W x D	H x W x D	H x W x D	H x W x D
Crated (in.)	46 x 30 x 33	46 x 30 x 33	50 x 35 x 38	50 x 35 x 38
Weight				
Shipping (Lbs.)	200	200	237	237
Net (Lbs.)	181	181	211	211
Optional Accessories				

Table 1. Models 5A6V0X24A1000A, 5A6V0X24A1000B, 5A6V0X36A1000A, and 5A6V0X36A1000B (continued)

Outdoor Unit (a) (b)	5A6V0X24A1000A	5A6V0X24A1000B	5A6V0X36A1000A	5A6V0X36A1000B
GFCI Kit	TR02LGFCI25	TR02LGFCI25	TR02LGFCI30	TR02LGFCI30
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Snow Leg – Base and Cap 4-in. High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg – 4-in. Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
SmartCharge™ Tool	BAYCAKT002	BAYCAKT002	BAYCAKT002	BAYCAKT002
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023	BAYECMT023	BAYECMT023
Refrigerant Lineset (g)	—			

(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

(b) Rated in accordance with AHRI standard 270/275.

(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

(d) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

(e) This value approximate. For more precise value see unit nameplate.

(f) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006*-EN) for long line sets or specialty applications (xx denotes latest revision).

(g) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

Table 2. Models 5A6V0X48A1000A, 5A6V0X48A1000B, 5A6V0X60A1000A, and 5A6V0X60A1000B

Outdoor Unit (a) (b)	5A6V0X48A1000A	5A6V0X48A1000B	5A6V0X60A1000A	5A6V0X60A1000B
Power Conns. – V/Ph/Hz (c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. Brch. Cir. Ampacity	32	32	43	40
Br. Cir. Prot. Rtg. – Rec/Max. (Amps)	35/50	35/50	50/60	40/60
Compressor	Scroll	Scroll	Rotary	Rotary
No. Used – No. Speeds	1 – Variable	1 – Variable	1 – Variable	1 – Variable
MRC	22.4	22.4	46.1	46.1
Factory Installed				
Start Components (d)	No	No	No	No
Insulation/Sound Blanket	Yes	Yes	Yes	Yes
Compressor Heat	Yes	Yes	Yes	Yes
Outdoor Fan				
Dia. (in.) – No. Used	27.5 – 1	27.5 – 1	27.5 – 1	27.5 – 1
Type Drive – No. Speeds	Direct – Variable	Direct – Variable	Direct – Variable	Direct – Variable
No. Motors – Hp	1 – 1/2	1 – 1/2	1 – 1/2	1 – 1/2
Motor Speed R.P.M.	200 – 1200	200 – 1200	200 – 1200	200 – 1200
Volts/Ph/Hz	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60
MOC	2.3	2.3	2.3	2.3
Outdoor Coil – Type	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Rows – F.P.I.	2 – 24	2 – 24	2 – 24	2 – 24
Face Area (Sq. Ft.)	30.8	30.8	30.8	30.8
Tube Size (in.)	3/8	3/8	3/8	3/8
Refrigerant	R-454B	R-454B	R-454B	R-454B

Product Specifications

Table 2. Models 5A6V0X48A1000A, 5A6V0X48A1000B, 5A6V0X60A1000A, and 5A6V0X60A1000B (continued)

Outdoor Unit ^(a) ^(b)	5A6V0X48A1000A	5A6V0X48A1000B	5A6V0X60A1000A	5A6V0X60A1000B
Lbs. – R-454B (O.D. Unit) ^(e)	11 Lb – 0 Oz	11 Lb – 0 Oz	11 Lb – 10 Oz	11 Lb – 10 Oz
Factory Supplied	Yes	Yes	Yes	Yes
Rated Line Size – in. O.D. Gas ^(f)	7/8	7/8	3/4	3/4
Rated Line Size – in. O.D. Liq. ^(f)	5/16	5/16	5/16	5/16
Charging Specifications				
Subcooling (°F)	8	8	8	8
Dimensions	H x W x D	H x W x D	H x W x D	H x W x D
Crated (in.) (°F)	50 x 35 x 38	50 x 35 x 38	50 x 35 x 38	50 x 35 x 38
Weight				
Shipping (Lbs.)	257	257	295	295
Net (Lbs.)	231	231	269	269
Optional Accessories				
GFCI Kit	TR04LGFCI35	TR04LGFCI35	TR04LGFCI40	TR04LGFCI40
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Snow Leg – Base and Cap 4-in. High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg – 4-in. Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
SmartCharge™ Tool	BAYCAKT002	BAYCAKT002	BAYCAKT002	BAYCAKT002
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023	BAYECMT023	BAYECMT023
Refrigerant Lineset ^(g)	—			

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Rated in accordance with AHRI standard 270/275.

^(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(d) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

^(e) This value approximate. For more precise value see unit nameplate.

^(f) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006*-EN) for long line sets or specialty applications (xx denotes latest revision).

^(g) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.


Sound Data

Table 3. Models 5A6V0X24A, 5A6V0X36A, 5A6V0X48A, and 5A6V0X60A

Model	Mode	Speed	A-Weighted Sound Power Level [dB (A)]	Full Octave Sound Power [dB]							
				63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5A6V0X24A	Cool	Min	52	64.2	48.8	52.0	52.3	44.6	37.1	34.2	33.7
	Cool	Max	64	69.5	62.6	59.5	64.4	59.5	50.5	47.0	42.4
	Heat	Min	51	61.4	45.8	50.9	49.9	44.9	39.2	37.6	38.0
	Heat	Max	71	73.9	70.7	68.7	70.0	67.2	59.9	55.2	49.8
5A6V0X36A	Cool	Min	53	63.6	51.2	52.5	51.5	48.2	43.4	34.7	38.3
	Cool	Max	69	82.2	70.3	68.3	65.6	65.5	58.3	53.3	48.9
	Heat	Min	55	63.8	52.9	55.9	53.4	49.1	44.4	40.4	42.1
	Heat	Max	74	79.0	77.8	75.0	71.8	69.9	63.3	59.5	53.7
5A6V0X48A	Cool	Min	56	64.8	54.6	56.2	53.6	52.4	47.4	38.0	33.0
	Cool	Max	73	79.7	74.4	72.7	71.3	68.4	63.7	58.2	49.8
	Heat	Min	57	64.8	54.9	56.4	53.6	51.3	48.7	45.5	40.1
	Heat	Max	75	82.1	75.5	74.5	72.2	69.7	65.4	61.2	52.8
5A6V0X60A	Cool	Min	63	62.1	56.5	60.2	61.7	61.6	45.4	37.4	38.2
	Cool	Max	74	75.5	74.2	73.1	73.5	68.6	63.6	59.2	51.8
	Heat	Min	61	64.6	56.0	57.4	58.2	59.1	46.4	42.6	39.2
	Heat	Max	73	87.3	77.8	72.0	71.2	67.2	63.3	60.4	52.1

Note: Rated in accordance with AHRI Standard 270.

Figure 1. Wiring diagram

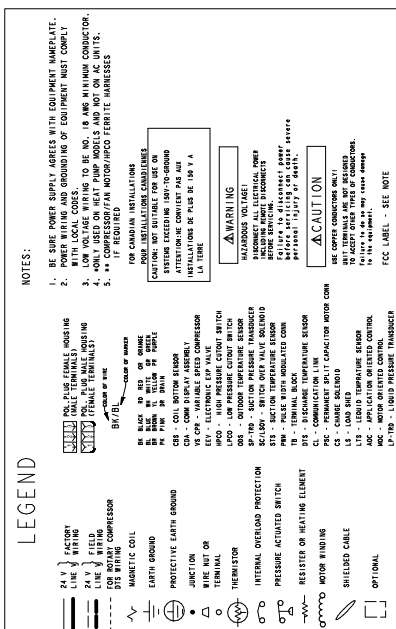

APPROVED	INTERMEDIATE
3.5 MIL WHITE POLYMER LINE	3.5 MIL WHITE FACEDTACK, 48 LB.
FACEDTACK, 45 LB. THICKNESS 18 LB.	40 LB. THICKNESS WITH ADHESIVE 4.2 MILS.
ADHESIVE THICKNESS 4.3-5 MILS	POWER SUPER CALENDARED BAKT FIBRE
1.5 MILS. 100 POUNDS PER LINE WHICH IS 2.2 MILS	MUCH IS 5.4 MILS THICK.
7.2 MILS	6.4 MILS
TOTAL THICKNESS OF LINE, ADHESIVE AND LINER	
C-1277	C4800 NUMBER BASED ADHESIVE
45°F TO 70°F	45°F TO 70°F
SERVICE TEMPERATURE RANGE	

R-454B REFRIGERANT CHARGING CHART								
LIQUID TEMP (°F)	DESIGN SUBCOOLING (°F)							LIQUID GASE PRESSURE (PSI)
	8	9	10	11	12	13	14	
55	170	172	175	178	181	184	187	
60	184	187	190	194	197	201	203	
65	200	203	207	210	214	217	220	
70	217	220	224	227	231	234	238	
75	237	239	241	245	249	252	256	
80	257	259	261	264	268	272	276	
85	277	278	280	284	288	292	297	
90	297	299	301	305	309	314	318	
95	314	318	321	327	332	336	341	
100	336	341	346	351	355	360	365	
105	360	365	370	375	380	385	390	
110	385	390	396	401	406	412	417	
115	417	422	428	433	439	445	451	
120	439	445	450	456	462	468	474	
125	468	474	480	486	492	498	504	

Dimensional Data

Figure 2. Dimensional drawing



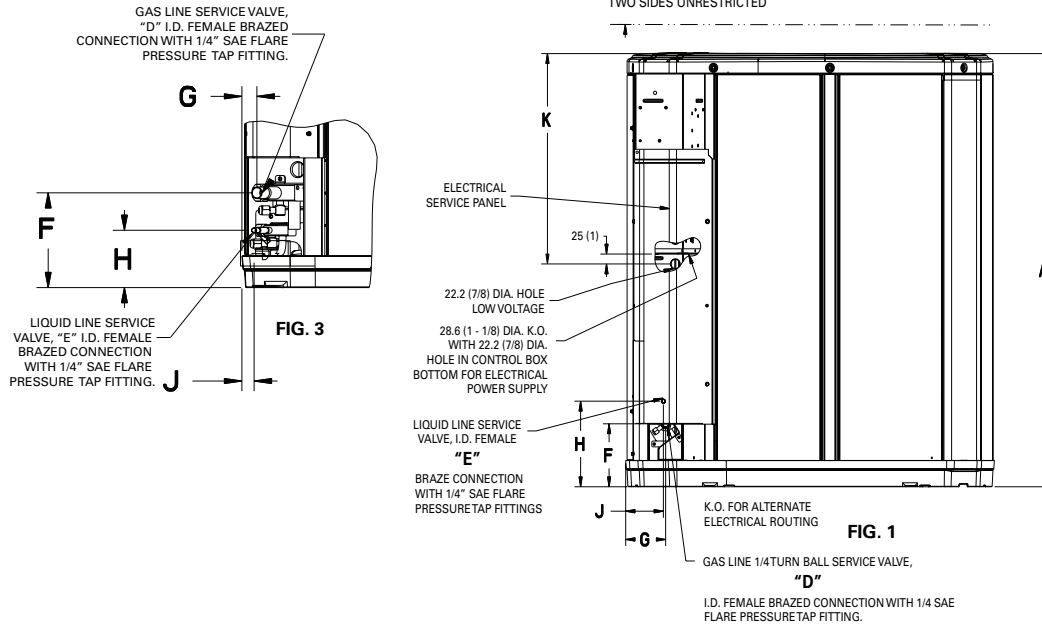


Table 4. Dimensions (inch)

Model	Base	A	B	C	D	E	F	G	H	J	K
5A6V0X24A	3	1035 (40-3/4)	829 (32-5/8)	756 (29-3/4)	13-1/2	8-5/16	127 (5)	76 (3)	197 (7-3/4)	60 (2-3/8)	813 (32)
5A6V0X36A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	16-5/8	8-5/16	156 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5A6V0X48A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	22-7/8	8-5/16	156 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5A6V0X60A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	22-7/8	8-5/16	156 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)


Balance Point Heat Capacity Worksheets

Figure 3. 2-ton heating capacity – model 5A6V0X24A1

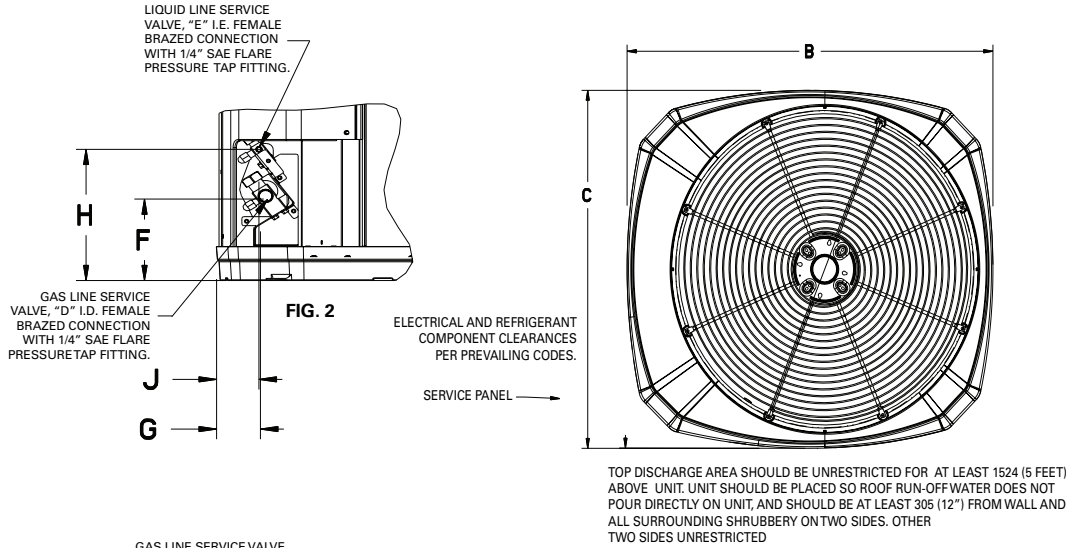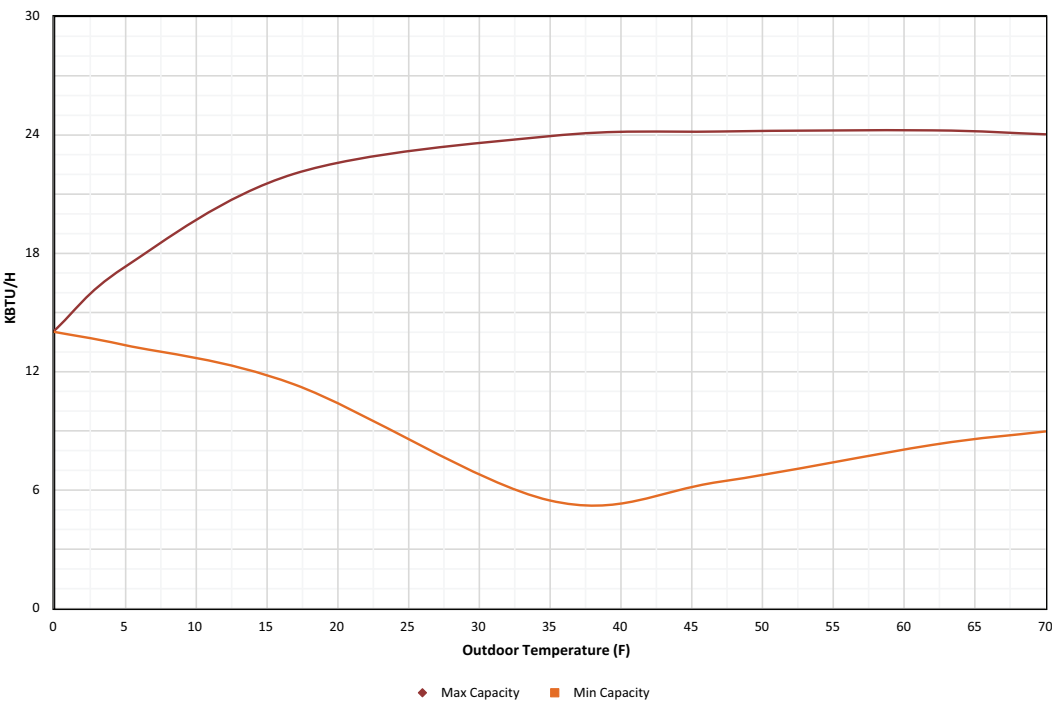


Note: Based on 70°F Indoor Return Air.

Figure 4. 3-ton heating capacity – model 5A6V0X36A1

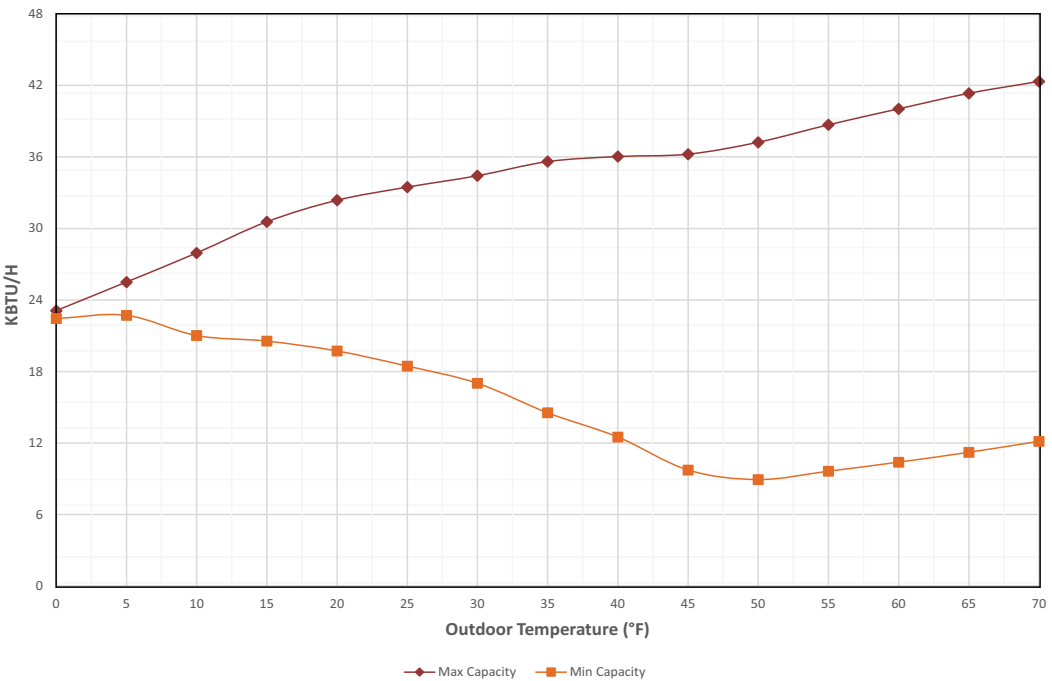


Note: Based on 70°F Indoor Return Air.

Figure 5. 4-ton heating capacity – model 5A6V0X48A1

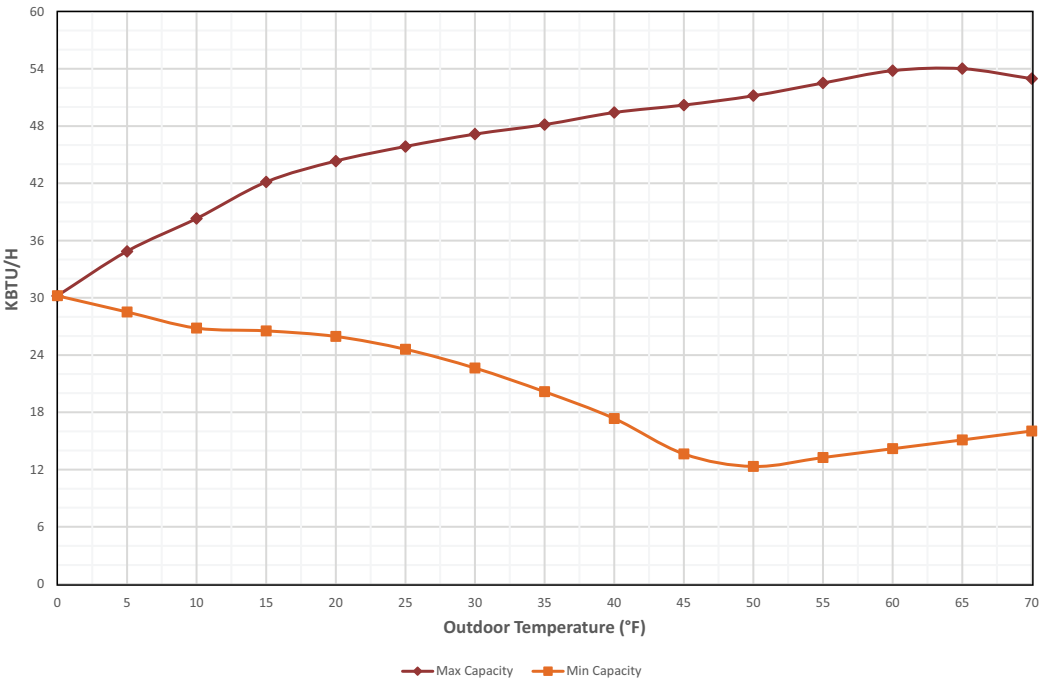

Note: Based on 70°F Indoor Return Air.

Figure 6. 5-ton heating capacity – model 5A6V0X60A1

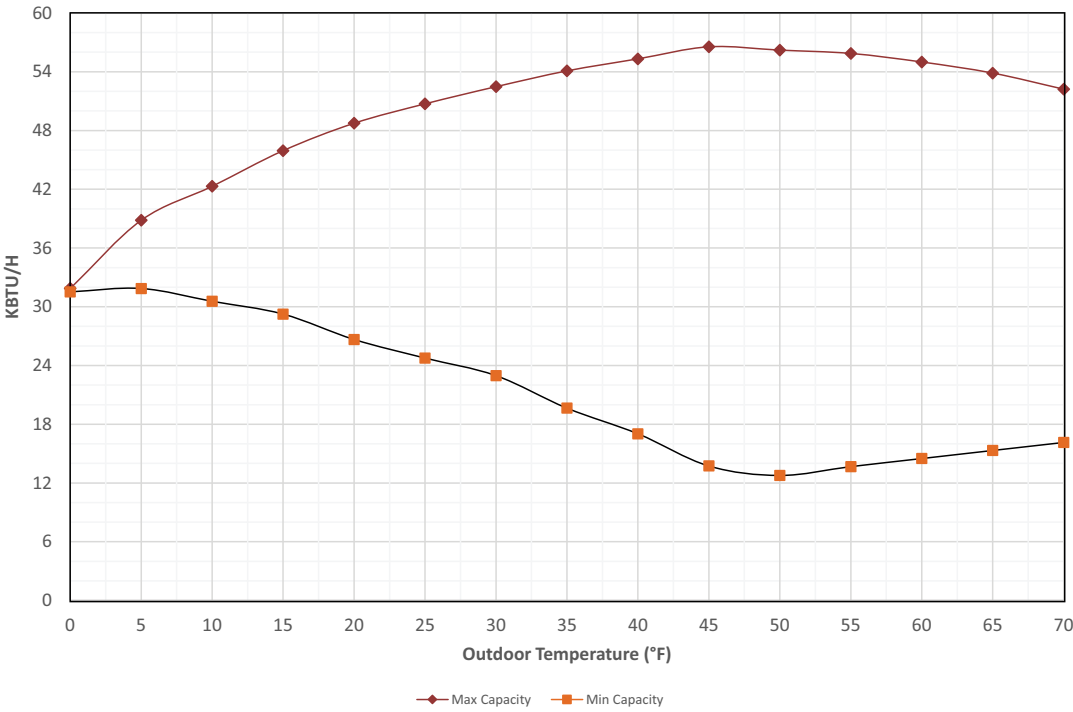

Note: Based on 70°F Indoor Return Air.

Mechanical Specification Options

General

This unit is designed to operate at outdoor ambient temperatures from 55°F to 120°F in cooling. From 0°F to 66°F in heating (heat pumps only). Only AHRI approved indoor matches are approved for use with these models.

American Standard Link Air Conditioners

This outdoor unit contains the American Standard Link Air Conditioners digital communication with Plug-n-Play set up.

Casing

Unit casing is constructed of heavy gauge. G60 galvanized steel and painted with a weather-resistant powder paint on all louvered panels and prepaint on all other panels. Corrosion and weatherproof CMBP-G30 DuraBase™.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor inverter drive and high and low pressure switches. A factory supplied, field installed filter is standard.

Compressor

Inverter driven compressor with variable output capacities. Noise enclosure minimizes sound levels. Compressor protections reduce operating speed and current draw to maintain operation while protecting the compressor.

Condenser Coil

The Spine Fin™ outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has built in freeze protection that will allow cooling operation below 55°F but will reduce capacity or shut down completely to prevent operation under adverse conditions.

Comfort Control

This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.

BUILT TO A HIGHER STANDARD[®]

American Standard[®]

HEATING & AIR CONDITIONING

About American Standard Heating and Air Conditioning

American Standard has been creating comfortable and affordable living environments for more than a century. For more information, please visit www.americanstandardair.com.



The AHRI Certified mark indicates company participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.