

BUILT TO A HIGHER STANDARD[®]


American Standard[®]

HEATING & AIR CONDITIONING

Product and Submittal Data

20 AccuComfort™ Variable Speed Platinum Air Conditioners

5A7V0X24A1000A/B
5A7V0X25A1000A/B
5A7V0X36A1000A/B
5A7V0X48A1000A/B
5A7V0X60A1000A/B

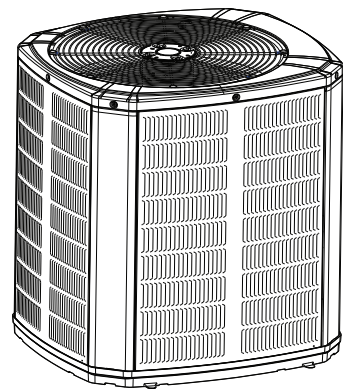

*Note: Graphics in this document are for representation only.
Actual model may differ in appearance.*

Introduction

Copyright

This document and the information in it are the property of Trane, and may not be used or reproduced in whole or in part without written permission. Trane reserves the right to revise this publication at any time, and to make changes to its content without obligation to notify any person of such revision or change.

Trademark

All trademarks referenced in this document are the trademarks of their respective owners.

Revision History

- Updated the tables in Product Specifications chapter.
- Updated the wiring diagram.

Diagnostics Mobile App



The Diagnostics Mobile App is available by scanning a QR code above, the one located inside this unit or by searching for the Trane or American Standard Diagnostics App in your App Store®. This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.

Table of Contents

Model Number Description 4

General Data 5

Product Specifications 6

Sound Data..... 10

Wiring Diagram 11

Dimensional Data..... 12

Mechanical Specification Options..... 13

Model Number Description

Digit 1 – Refrigerant Type

5 = R-454B

Digit 2 – Brand

A = American Standard

Digit 3 – System Type

5 = Cold Climate Heat Pump

6 = HP

7 = AC

Digit 4 – Product Family

A = Silver/Gold AC

C = Light Commercial

H = Silver/Gold HP

V = Platinum VSPD

Digit 5 – Nominal Rated SEER2

0 = 20 SEER2

3 = 13 SEER2

4 = 14 SEER2

5 = 15 SEER2

6 = 16 SEER2

7 = 17 SEER2

8 = 18 SEER2

Digit 6 – Field Connection

0 = Brazed

X = Link™

Digit 7, 8 – Nominal Tonnage

12 = 1.0

18 = 1.5

19 = 1.5

24 = 2.0

25 = 2.0

30 = 2.5

31 = 2.5

36 = 3.0

37 = 3.0

42 = 3.5

43 = 3.5

48 = 4.0

49 = 4.0

60 = 5.0

61 = 5.0

Digit 9 – Major Design Change

A Thru Z Mode = No F, I, 0

Digit 10 – Power Supply (Voltage/Ph/Hz)

1 = 200–208–230/1/60

3 = 200–230/3/60

4 = 460/3/60

Digit 11, 12, 13 – Other Functions

000 = Typical-no meaning

Digit 14 – Minor Design Change

A Thru Z Mode = No F, I, 0

Digit 14 – Service Digit - Not Orderable

A Thru Z Mode = No F, I, 0

General Data

AHRI standard 210/240 rating conditions:

- Cooling: 80°F DB; air entering indoor coil: 67°F WB; air entering outdoor coil: 95°F DB
- High temperature heating: 47°F DB; air entering outdoor coil: 43°F WB; entering indoor coil: 70°F DB
- Low temperature heating: 17°F DB; air entering outdoor coil: 15°F WB; air entering indoor coil: 70°F DB
- Rated indoor airflow for heating is the same as for cooling.

AHRI standard 270 rating conditions:

The noise rating numbers are determined with the unit in cooling operation. Standard Noise Rating number is at 95°F outdoor air.

Product Specifications

Table 1. Models 5A7V0X24A1000A, 5A7V0X24A1000B, 5A7V0X25A1000A, and 5A7V0X25A1000B

Outdoor Unit ^{(a) (b)}	5A7V0X24A1000A	5A7V0X24A1000B	5A7V0X25A1000A	5A7V0X25A1000B
Power Conns. – V/Ph/Hz ^(c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. Brch. Cir. Ampacity	19	19	19	19
Br. Cir. Prot. Rtg. – Rec/Max. (Amps)	20/30	20/30	20/30	20/30
Compressor	Rotary	Rotary	Rotary	Rotary
No. Used – No. Speeds	1 – Variable	1 – Variable	1 – Variable	1 – Variable
MRC	17.8	17.8	17.8	17.8
Factory Installed				
Start Components ^(d)	No	No	No	No
Insulation/Sound Blanket	Yes	Yes	Yes	Yes
Compressor Heat	Yes	Yes	Yes	Yes
Outdoor Fan				
Dia. (in.) – No. Used	23 – 1	23 – 1	27.5 – 1	27.5 – 1
Type Drive – No. Speeds	Direct – Variable	Direct – Variable	Direct – Variable	Direct – Variable
No. Motors – Hp	1 – 1/3	1 – 1/3	1 – 1/2	1 – 1/2
Motor Speed R.P.M.	200 – 1200	200 – 1200	200 – 1200	200 – 1200
Volts/Ph/Hz	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60
MOC	1.5	1.5	2.3	2.3
Outdoor Coil – Type	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Rows – F.P.I.	1 – 24	1 – 24	2 – 24	2 – 24
Face Area (Sq. Ft.)	19.77	19.77	30.8	30.8
Tube Size (in.)	3/8	3/8	3/8	3/8
Refrigerant	R-454B	R-454B	R-454B	R-454B
Lbs. – R-454B (O.D. Unit) ^(e)	7 LB - 9 OZ	7 LB - 9 OZ	11 LB – 2 OZ	11 LB – 2 OZ
Factory Supplied	Yes	Yes	Yes	Yes
Rated Line Size – in. O.D. Gas ^(f)	1/2	1/2	1/2	1/2
Rated Line Size – in. O.D. Liq. ^(f)	5/16	5/16	5/16	5/16
Charging Specifications				
Subcooling (°F)	10	10	8	8
Dimensions	H x W x D	H x W x D	H x W x D	H x W x D
Crated (in.)	46 x 30 x 33	46 x 30 x 33	50 x 35 x 38	50 x 35 x 38
Weight				
Shipping (Lbs.)	197	197	245	245
Net (Lbs.)	176	176	219	219
Optional Accessories				
GFCI Kit	TR02LGFCI25	TR02LGFCI25	TR02LGFCI25	TR02LGFCI25
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Snow Leg – Base and Cap 4-in. High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg – 4-in. Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
SmartCharge™ Tool	BAYCAKT002	BAYCAKT002	BAYCAKT002	BAYCAKT002

Table 1. Models 5A7V0X24A1000A, 5A7V0X24A1000B, 5A7V0X25A1000A, and 5A7V0X25A1000B (continued)

Outdoor Unit ^{(a) (b)}	5A7V0X24A1000A	5A7V0X24A1000B	5A7V0X25A1000A	5A7V0X25A1000B
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023	BAYECMT023	BAYECMT023
Refrigerant Lineset ^(g)	—			

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Rated in accordance with AHRI standard 270/275.

^(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(d) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

^(e) This value approximate. For more precise value see unit nameplate.

^(f) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006*-EN) for long line sets or specialty applications (xx denotes latest revision).

^(g) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

Table 2. Models 5A7V0X36A1000A, 5A7V0X36A1000B, 5A7V0X48A1000A, and 5A7V0X48A1000B

Outdoor Unit ^{(a) (b)}	5A7V0X36A1000A	5A7V0X36A1000B	5A7V0X48A1000A	5A7V0X48A1000B
Power Conns. – V/Ph/Hz ^(c)	208/230/1/60	208/230/1/60	208/230/1/60	208/230/1/60
Min. Brch. Cir. Ampacity	26	26	32	29
Br. Cir. Prot. Rtg. – Rec/Max. (Amps)	30/40	30/40	35/50	30/50
Compressor	Scroll	Scroll	Scroll	Scroll
No. Used – No. Speeds	1 – Variable	1 – Variable	1 – Variable	1 – Variable
MRC	18	18	22.4	22.4
Factory Installed				
Start Components ^(d)	No	No	No	No
Insulation/Sound Blanket	Yes	Yes	Yes	Yes
Compressor Heat	Yes	Yes	Yes	Yes
Outdoor Fan				
Dia. (in.) – No. Used	27.5 – 1	27.5 – 1	27.5 – 1	27.5 – 1
Type Drive – No. Speeds	Direct – Variable	Direct – Variable	Direct – Variable	Direct – Variable
No. Motors – Hp	1 – 1/2	1 – 1/2	1 – 1/2	1 – 1/2
Motor Speed R.P.M.	200 – 1200	200 – 1200	200 – 1200	200 – 1200
Volts/Ph/Hz	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60	245 – 385/3/60
MOC	2.3	2.3	2.3	2.3
Outdoor Coil — Type	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Rows – F.P.I.	2 – 24	2 – 24	2 – 24	2 – 24
Face Area (Sq. Ft.)	30.8	30.8	30.8	30.8
Tube Size (in.)	3/8	3/8	3/8	3/8
Refrigerant	R-454B	R-454B	R-454B	R-454B
Lbs. – R-454B (O.D. Unit) ^(e)	12 LB – 6 OZ	12 LB – 6 OZ	13 LB – 8 OZ	13 LB – 8 OZ
Factory Supplied	Yes	Yes	Yes	Yes
Rated Line Size – in. O.D. Gas ^(f)	5/8	5/8	7/8	7/8
Rated Line Size – in. O.D. Liq. ^(f)	5/16	5/16	5/16	5/16
Charging Specifications				
Subcooling (°F)	8	8	8	8
Dimensions				
Crated (in.)	50 x 35 x 38	50 x 35 x 38	50 x 35 x 38	50 x 35 x 38
Weight	H x W x D	H x W x D	H x W x D	H x W x D
Shipping (Lbs.)	280	280	280	280

Product Specifications

Table 2. Models 5A7V0X36A1000A, 5A7V0X36A1000B, 5A7V0X48A1000A, and 5A7V0X48A1000B (continued)

Outdoor Unit ^{(a) (b)}	5A7V0X36A1000A	5A7V0X36A1000B	5A7V0X48A1000A	5A7V0X48A1000B
Net (Lbs.)	254	254	254	254
Optional Accessories				
GFCI Kit	TR02LGFCI30	TR02LGFCI30	TR02LGFCI30	TR02LGFCI30
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Snow Leg – Base and Cap 4-in. High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg – 4-in. Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
SmartCharge™ Tool	BAYCAKT002	BAYCAKT002	BAYCAKT002	BAYCAKT002
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023	BAYECMT023	BAYECMT023
Refrigerant Lineset ^(g)	—			

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Rated in accordance with AHRI standard 270/275.

^(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(d) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

^(e) This value approximate. For more precise value see unit nameplate.

^(f) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006*-EN) for long line sets or specialty applications (xx denotes latest revision).

^(g) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

Table 3. Models 5A7V0X60A1000A and 5A7V0X60A1000B

Outdoor Unit ^{(a) (b)}	5A7V0X60A1000A	5A7V0X60A1000B
Power Conns. – V/Ph/Hz ^(c)	208/230/1/60	208/230/1/60
Min. Brch. Cir. Ampacity	43	33
Br. Cir. Prot. Rtg. – Rec/Max. (Amps)	50/60	35/60
Compressor	Scroll	Scroll
No. Used – No. Speeds	1 – Variable	1 – Variable
MRC	27.5	27.5
Factory Installed		
Start Components ^(d)	No	No
Insulation/Sound Blanket	Yes	Yes
Compressor Heat	Yes	Yes
Outdoor Fan		
Dia. (in.) – No. Used	27.5 – 1	27.5 – 1
Type Drive – No. Speeds	Direct – Variable	Direct – Variable
No. Motors – Hp	1 – 1/2	1 – 1/2
Motor Speed R.P.M.	200 – 1200	200 – 1200
Volts/Ph/Hz	245 – 385/3/60	245 – 385/3/60
MOC	2.3	2.3
Outdoor Coil – Type	Spine Fin™	Spine Fin™
Rows – F.P.I.	2 – 24	2 – 24
Face Area (Sq. Ft.)	30.8	30.8
Tube Size (in.)	3/8	3/8
Refrigerant	R-454B	R-454B
Lbs. – R-454B (O.D. Unit) ^(e)	13 LB – 1 OZ	13 LB – 1 OZ
Factory Supplied	Yes	Yes
Rated Line Size – in. O.D. Gas ^(f)	7/8	7/8

Table 3. Models 5A7V0X60A1000A and 5A7V0X60A1000B (continued)

Outdoor Unit ^(a) ^(b)	5A7V0X60A1000A	5A7V0X60A1000B
Rated Line Size – in. O.D. Liq. ^(f)	5/16	5/16
Charging Specifications		
Subcooling (°F)	8	8
Dimensions		
Crated (in.)	50 x 35 x 38	50 x 35 x 38
Weight	H x W x D	H x W x D
Shipping (Lbs.)	280	280
Net (Lbs.)	254	254
Optional Accessories		
GFCI Kit	TR04LGFCI35	TR04LGFCI35
Rubber Isolator Kit	BAYISLT101	BAYISLT101
Snow Leg – Base and Cap 4-in. High	BAYLEGS002	BAYLEGS002
Snow Leg – 4-in. Extension	BAYLEGS003	BAYLEGS003
SmartCharge [™] Tool	BAYCAKT002	BAYCAKT002
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT023
Refrigerant Lineset ^(g)	—	

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Rated in accordance with AHRI standard 270/275.

^(c) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(d) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter. Optional kit shown.

^(e) This value approximate. For more precise value see unit nameplate.

^(f) Reference the outdoor unit ship-with literature for refrigerant piping length and lift guidelines. Reference the refrigerant piping software pub # 32-3312-xx or *Refrigerant Piping Manual for Small Split Cooling and Heat Pump Systems Application Guide* (SS-APG006*-EN) for long line sets or specialty applications (xx denotes latest revision).

^(g) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

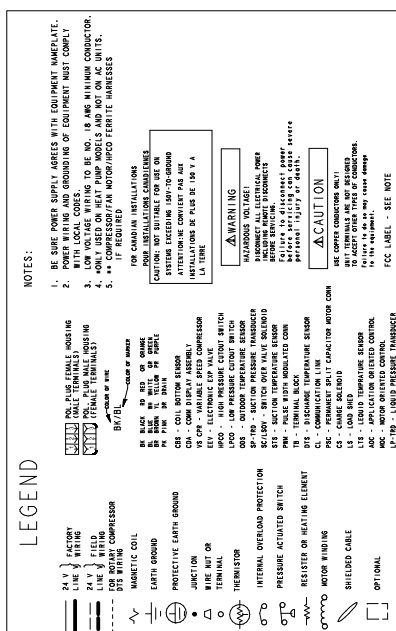
Sound Data

Table 4. Models 5A7V0X24A, 5A7V0X25A, 5A7V0X36A, 5A7V0X48A, and 5A7V0X60A

Model	Mode	Speed	A-Weighted Sound Power Level [dB (A)]	Full Octave Sound Power [dB]							
				63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5A7V0X24A	Cool	Min	52	64.2	48.8	52.0	52.3	44.6	37.1	34.2	33.7
	Cool	Max	64	69.5	62.6	59.5	64.4	59.5	50.5	47.0	42.4
5A7V0X25A	Cool	Min	58	65.9	54.9	54.2	58.5	51.2	41.8	32.5	38.7
	Cool	Max	66	73.6	67.1	64.6	63.4	60.8	54.4	47.2	43.4
5A7V0X36A	Cool	Min	53	63.6	51.2	52.5	51.5	48.2	43.4	34.7	38.3
	Cool	Max	69	82.2	70.3	68.3	65.6	65.5	58.3	53.3	48.9
5A7V0X48A	Cool	Min	56	64.8	54.6	56.2	53.6	52.4	47.4	38.0	33.0
	Cool	Max	73	79.7	74.4	72.7	71.3	68.4	63.7	58.2	49.8
5A7V0X60A	Cool	Min	56	62.1	54.6	56.2	53.6	52.4	47.4	38.0	33.0
	Cool	Max	76	77.6	76.7	74.9	74.4	71.6	66.5	61.9	53.7

Note: Rated in accordance with AHRI Standard 270.



Figure 1. Wiring diagram

[illegible]

R-454B REFRIGERANT CHARGING CHART		DESIGN SUBCOOLING (°F)							LIQUID GASE PRESSURE (PSI)		
LIQUID TEMP (°F)	8	9	10	11	12	13	14	15	16	17	18
55	170	172	175	178	181	184	187				
60	184	187	190	194	197	200	203				
65	200	203	206	210	213	217	220				
70	217	220	224	227	231	235	238				
75	235	238	242	245	249	253	256				
80	254	256	260	264	268	272	276				
85	273	276	280	284	288	292	296				
90	292	297	301	305	309	313	318				
95	314	318	323	327	332	336	341				
100	336	341	346	351	355	360	365				
105	360	365	370	375	380	385	390				
110	385	390	396	401	406	412	417				
115	412	417	422	428	433	439	445				
120	439	445	450	456	462	468	474				
125	468	474	480	486	492	498	504				

Dimensional Data

Figure 2. Dimensional drawing

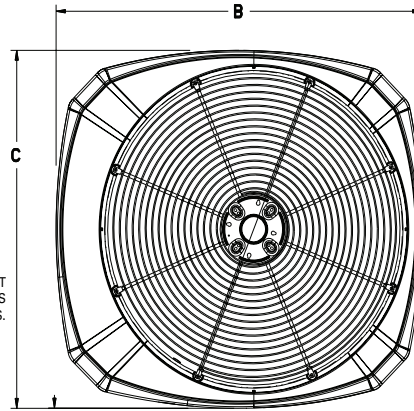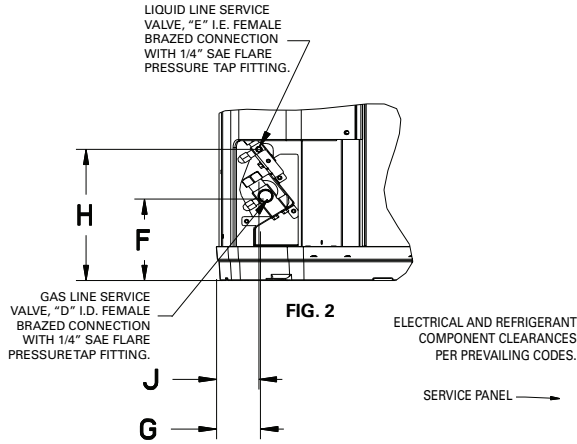

TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR AT LEAST 1524 (5 FEET) ABOVE UNIT. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT, AND SHOULD BE AT LEAST 305 (12") FROM WALL AND ALL SURROUNDING SHRUBBERY ON TWO SIDES. OTHER TWO SIDES UNRESTRICTED

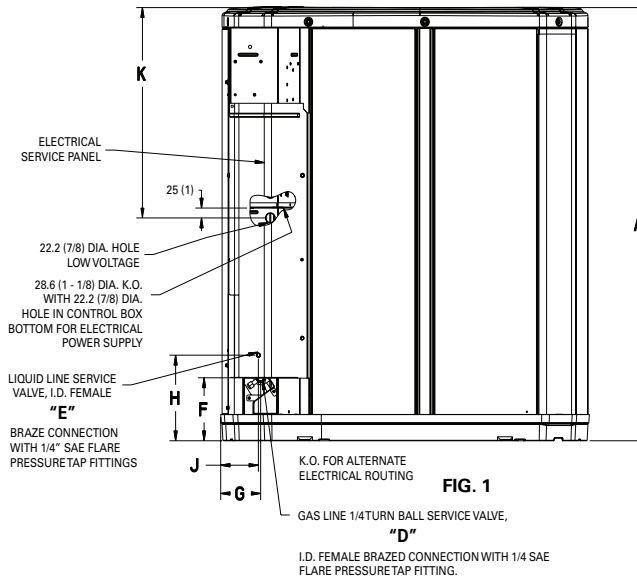
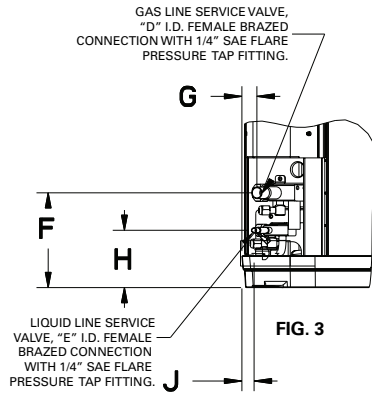


Table 5. Dimensions (inch)

Model	Base	A	B	C	D	E	F	G	H	J	K
5A7V0X24A	3	1035 (40-3/4)	829 (32-5/8)	756 (29-3/4)	13 (1/2)	8 (5/16)	127 (5)	76 (3)	197 (7-3/4)	60 (2-3/8)	813 (32)
5A7V0X25A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	16-5/8	8-5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5A7V0X36A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	16-5/8	8-5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5A7V0X48A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	22-7/8	8-5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5A7V0X60A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	22-7/8	8-5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)

Mechanical Specification Options

General

This unit is designed to operate at outdoor ambient temperatures from 55°F to 120°F in cooling. From 0°F to 66°F in heating (heat pumps only). Only AHRI approved indoor matches are approved for use with these models.

American Standard Link Air Conditioners

This outdoor unit contains the American Standard Link Air Conditioners digital communication with Plug-n-Play set up.

Casing

Unit casing is constructed of heavy gauge, G60 galvanized steel and painted with a weather-resistant powder paint on all louvered panels and prepaint on all other panels. Corrosion and weatherproof CMBP-G30 DuraBase™.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor inverter drive and high and low pressure switches. A factory supplied, field installed filter is standard.

Compressor

Inverter driven compressor with variable output capacities. Noise enclosure minimizes sound levels. Compressor protections reduce operating speed and current draw to maintain operation while protecting the compressor.

Condenser Coil

The Spine Fin™ outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has built in freeze protection that will allow cooling operation below 55°F but will reduce capacity or shut down completely to prevent operation under adverse conditions.

Comfort Control

This system must include a A/T HUI2360A200U thermostat and a TSYS2C60A2VVU system controller to operate and is Link communicating only.

BUILT TO A HIGHER STANDARD[®]

American Standard[®]

HEATING & AIR CONDITIONING

About American Standard Heating and Air Conditioning

American Standard has been creating comfortable and affordable living environments for more than a century. For more information, please visit www.americanstandardair.com.



The AHRI Certified mark indicates company participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.